



Test Console, Manual

Air Requirements:

110 PSIG

Electrical Requirements:

110 VAC, 220 VAC - 50/60 Hertz

Warranty:

Two Years

Dimensions:

Length: 36" (91.4 mm)
Width: 26" (66 mm)
Height: 72" (183mm)

Part Numbers: with Chart Recorder

01-51-0091, Console (sngl act pump) Alum
01-51-2168, Console (sngl act pump) SS
01-51-0553, Console (dbl act pump) Alum
01-51-2169, Console (dbl act pump) SS
01-51-1895, Console - Dual Test (dbl act pump) Alum

Part Numbers: less Chart Recorder

01-51-1343, Console (sngl act pump) Alum
01-51-1344, Console (dbl act pump) Alum
01-51-1896, Console - Dual Test (dbl act pump) Alum

Specifications:


- **Test Pressure Range:**
100 - 10,500 psig
- **Expansion Range:**
0 - 1,000 cc in 1/10 cc increments
- **Test Accuracy:**
Plus or minus 1/2% of full scale
- **Throughput Rate:**
Approx. 12 cyl. per hour
20 cyl. per hour (Dual)



Made in U.S.A.

Fredlov™ Inc.

Model FCCTC-10K

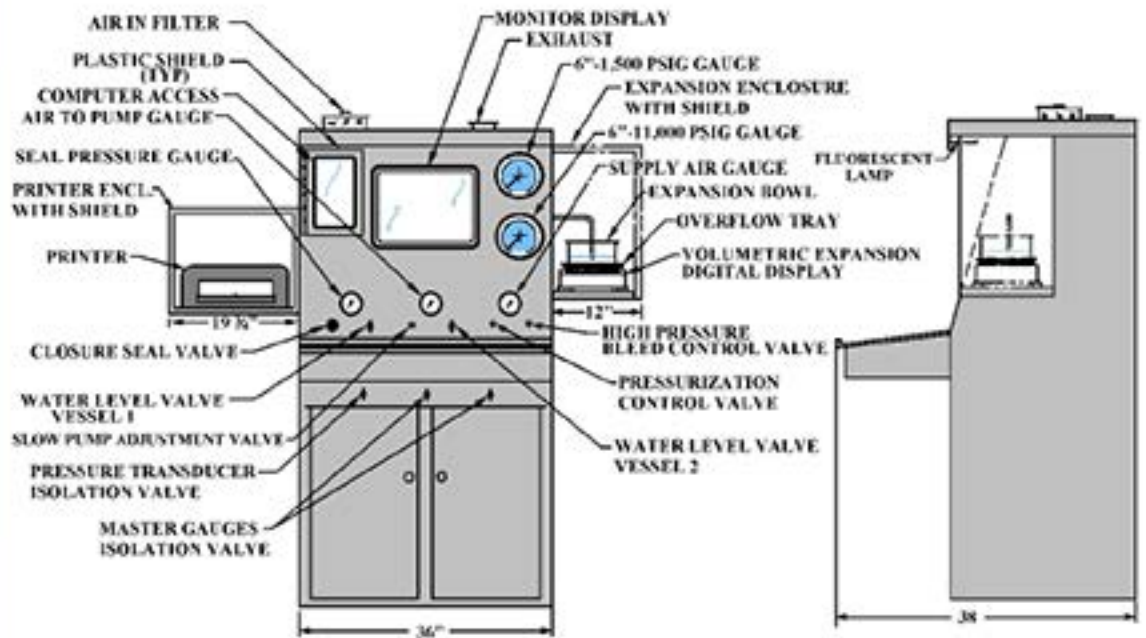

With a test time of approximately two minutes per test cycle, this system is a leading productivity tool in the industry. System has Alternating test capabilities built-in, and can optionally run as "Dual-Alternating" for increased production needs. With our advanced hydro-test software, testing and data recording becomes a simple process, and data is listed on a hardcopy printout, and additionally saved to digital media.

Test Console, Computerized



Model FCCTC-10K

Part Number:

25-52-0428 Alternating
25-52-0540 Dual Testing

Air Requirements:

120 PSIG, 60 SCFM

Electrical Requirements:

110 VAC, 220 VAC - 50/60 Hertz

Dimensions:

Length: 68 in (172.7 cm)
Width: 38 in (96.5 cm)
Height: 75 1/2 (191.7)
400 lbs (1016 kg)

Crated Specs:

Crate 50"L x 43"W x 85"H
Weight 550 lbs (250 kg) approx.

Warranty:

Two Years

Features

- Manual Override
- Double Acting Pump
- Aluminum or SS Console
- Advanced Hydro-Test Software
- Automated Computerized Testing
- Dual Testing Option Available

Specifications:

Test Pressure Range:

0 - 10,500 psig
(Contact factory for higher pressure requirements)

Expansion Range:


0 - 3,500 cc in 1/10 cc increments

Test Accuracy:

Plus or minus 1/2 % of full scale



Fredlov™ Incorporated

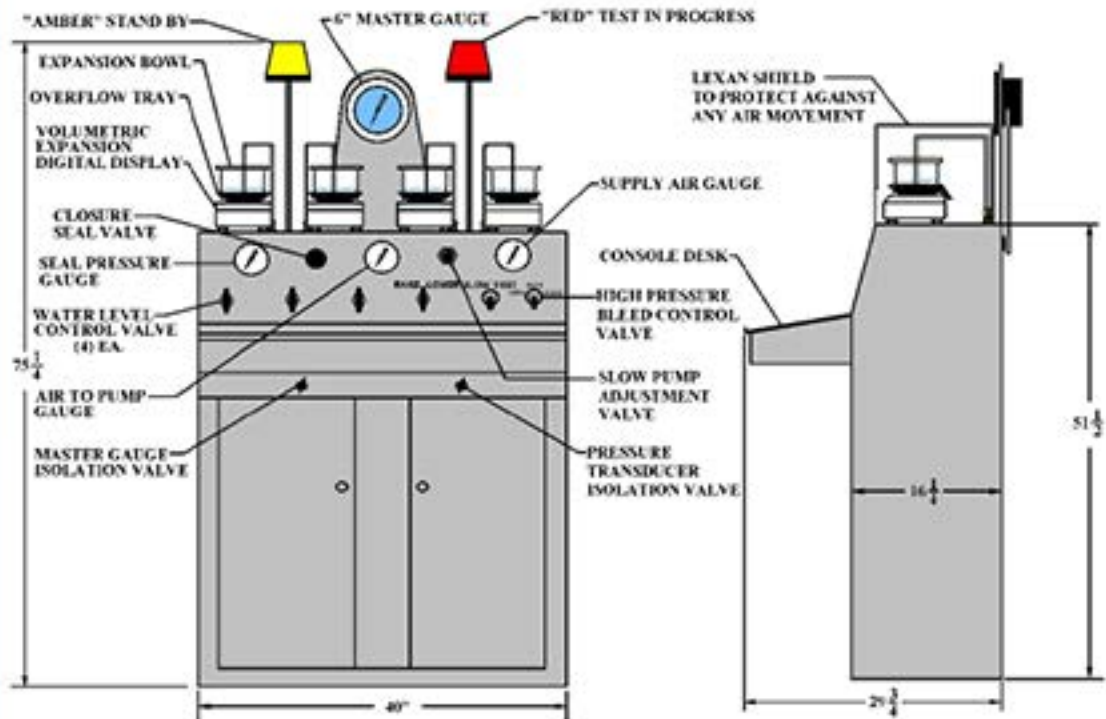

Test Console

Dual Indicator Lights: Stand By & Test in Progress

Specifications:

Test Pressure Range: 0 - 10,500 psig

Expansion Range: 0 - 3,500 cc in 1/10 cc increments

Test Accuracy: Plus or minus 1/2 % of full scale

Throughput Rate: Approx. 32 cylinders per hour

Air Requirements:

120 PSIG, 60 SCFM

Electrical Requirements:

110 VAC, 220 VAC - 50/60 Hertz

Warranty:

Two Years

**Model FFVTC-10K
Test Console**

Para más información comuníquese al
305.888.5353
o al correo electrónico
info@intltec.com

